

SPECIFICATION

Nominal Basket Diameter	12", 304.8mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	250W
Music Program	500W
Resonance	47Hz
Usable Frequency Range***	43Hz-3.8kHz
Sensitivity	98
Magnet Weight	38 oz.
Gap Height	0.31", 7.92mm
Voice Coil Diameter	2", 50.8mm

THIELE & SMALL PARAMETERS

Resonant Frequency (fs)	47Hz
DC Resistance (Re)	5.0
Coil Inductance (Le)	0.64mH
Mechanical Q (Qms)	6.0
Electromagnetic Q (Qes)	0.50
Total Q (Qts)	0.46
Compliance Equivalent Volume (Vas)	120.10 liters / 4.20 cu.ft.
Peak Diaphragm Displacement Volume (Vd)	237cc
Mechanical Compliance of Suspension (Cms)	0.29mm/N
BL Product (BL)	10.80 T-M
Diaphragm Mass inc. Airlod (Mms)	40 grams
Efficiency Bandwidth Product (EBP)	94.0
Maximum Linear Excursion (Xmax)	4.40mm
Surface Area of Cone (Sd)	538.9 cm2
Maximum Mechanical Limit (Xlim)	11mm

MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	25.50-35.40 liters/0.90-1.25cu.ft.
Vented	36.80-139.00 liters/1.30-4.9 cu.ft.
Overall Diameter	12.03", 305.5mm
Baffle Hole Diameter	10.95", 278.1mm
Front Sealing Gasket	Fitted as standard
Rear Sealing Gasket	Fitted as standard
Mounting Holes Diameter	0.25", 6.4mm
Mounting Holes B.C.D.	11.59", 294.3mm
Depth	4.57", 116mm
Net Weight	7.5 lbs., 3.4 kg
Shipping Weight	9.7 lbs., 4.4 kg

MATERIALS OF CONSTRUCTION


Copper voice coil
 Polyimide former
 Ferrite magnet
 Vented and extended core
 Pressed steel basket
 Paper Cone
 Cloth cone edge
 Solid composition paper dust cap




EMINENCE®
 The Art and Science of Sound

BETA-12A AMERICAN STANDARD SERIES

Recommended for professional audio and bass guitar applications as a woofer in a vented enclosure. Also works well for PA in a sealed or bandpass enclosure.

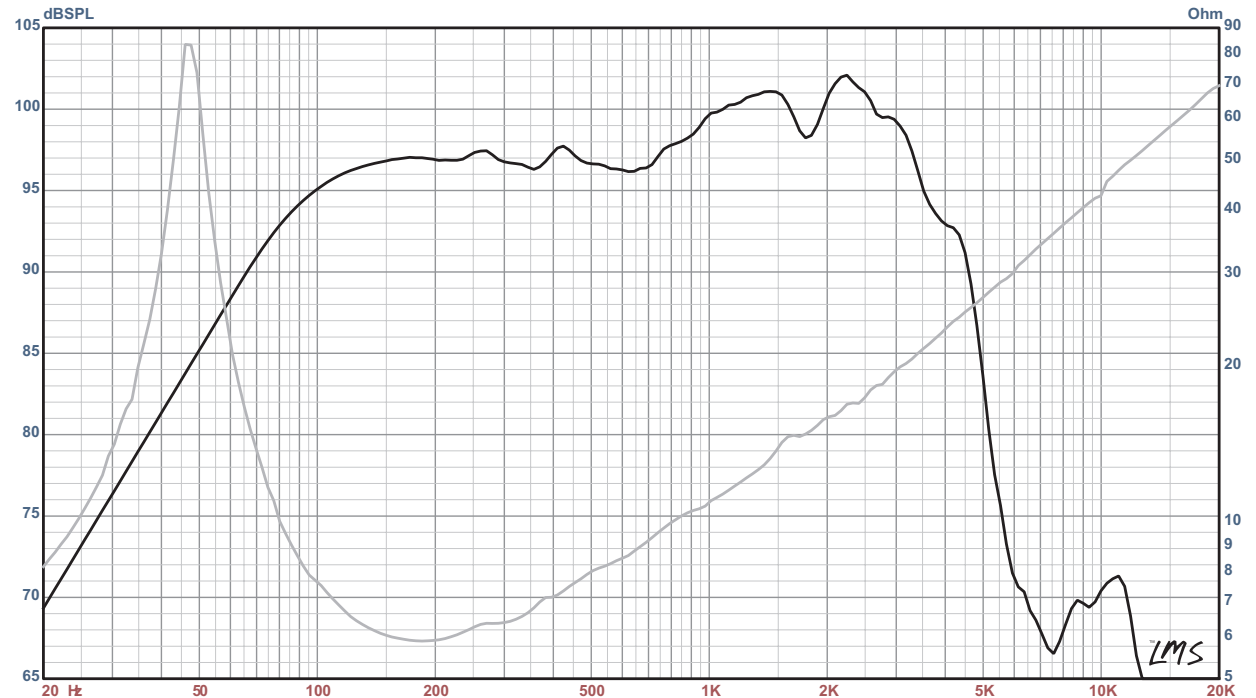

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

*** The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)