

TRAVIS TOY SIGNATURE

DOUBLE-T 15

With the Travis Toy signature Double-T 15 you get the benefit of more air movement from a larger 15" surface area, but with the punch and cut of a 12". This 4 ohm speaker is a direct drop-in replacement for all of the most common and beloved 15" steel guitar combo amps available.

15" | 300 WATTS
4 Ω



"The new Double-T 15 is everything I've always wanted a 15" speaker to be. The main reason I moved away from 15" speakers was the lack of "punch" that they typically have in comparison to a great 12" speaker. I feel it's a marriage of all of my favorite characteristics from both 12" and 15" speaker sizes." – Travis Toy / Session Artist / Touring Professional

SPECIFICATION

Nominal Basket Diameter

15", 381 mm

MOUNTING INFORMATION

Enclosure Type

MATERIALS OF CONSTRUCTION

Edge wound copper voice coil

Nominal Impedance*

4 Ω

Closed Back

Acceptable

Polyimide former

Power Rating*

300 W

Open Back

Acceptable

Neodymium magnet

Resonance (Fs)

56.5 Hz

Driver Volume Displaced

0.09 cu.ft., 2.54 liters

Vented core

Usable Frequency Range

80 Hz – 3.8 kHz

Overall Diameter

15.32", 389.1 mm

Cast aluminum basket

Sensitivity*

101 dB

Baffle Hole Diameter

14.0", 355.6 mm

Paper cone

DC Resistance (Re)

3.2 Ω

Depth

6.63", 168.28 mm

Cloth cone edge

Qts

0.33

Front Sealing Gasket

Yes

Paper dust cap

Magnet Weight

11 oz.

Rear Sealing Gasket

Yes

Gap Height

0.36", 9.1 mm

Mounting Holes Diameter

0.28", 7.1 mm

Voice Coil Diameter

3.0", 76.2 mm

Mounting Holes B.C.D.

14.56", 369.8 mm


Net Weight

7.7 lbs, 3.5 kg

Shipping Weight

9.9 lbs, 4.49 kg

FREQUENCY RESPONSE & IMPEDANCE CURVE*

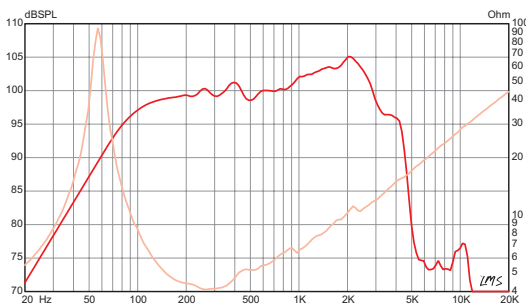

VISIT EMINENCE.COM TO FIND A DEALER NEAR YOU.

* See footnotes on page 2 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.

MISSION STATEMENT

Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.

FOOTNOTES

- * Please consult www.eminence.com for specifications of models with alternative impedances.
- ** Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.
- *** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).
- **** BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.
- ***** Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.
- *****The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

EMINENCE SPEAKER LLC

838 Mulberry Pike, Eminence, KY 40019



Follow us:

EMINENCE.COM

