



Specification

Throat Size	1", 25.4mm
Nominal Impedance*	8 or 16 ohms
Power Rating	50W
(AES Secification, 1.5kHz @ 12dB)	
Resonance	580Hz
Usable Frequency Range	1.5kHz - 16kHz
Recommended Crossover	1.5kHz/12dB
Sensitivity (1W @ 1m on axis on horn)	111dB
Magnet Weight	4.16 oz.
Voice Coil Diameter	2", 51mm
Re	6.8
Le	.95 mH

Mounting Information


The NSD drivers are available in either screw-on or bolt-on formats. Please specify your preferences when ordering.

Overall Diameter	3.87", 98.3mm
Mounting Holes Diameter	2X 1/4-20
Mounting Holes B.C.D.	3"
Mounting Thread	1 3/8" 18 NEF ext.
Depth	1.75", 44mm
Weight	2 lbs, 921g

Materials of Construction

Voice Coil Former	Polyimide
Diaphragm Material	Titanium
Magnet Composition	Neodymium

NSD:2005 HF Drivers

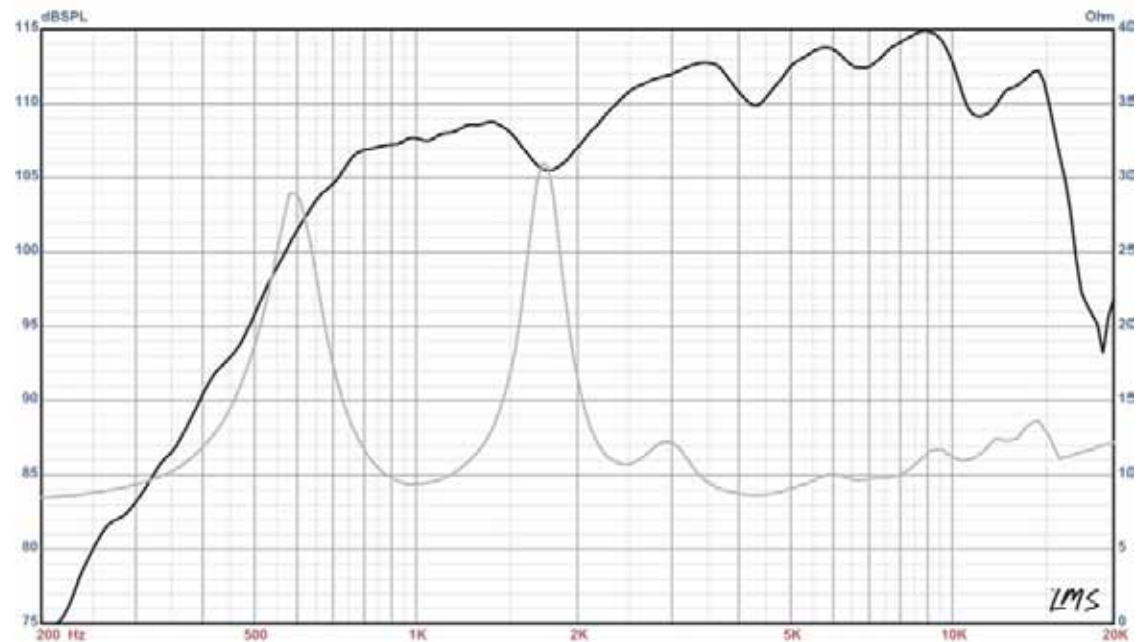

* 16 ohm model and specifications available. Please contact Eminence at (502)845-5622 or info@eminence.com for details.

A negative voltage at the red terminal causes a positive pressure at the output of the device.