



## PROFESSIONAL SERIES

# DEFINIMAX™ 4015LF

Recommended for professional audio and bass guitar as a low distortion woofer or subwoofer in vented enclosures. Also works in a sealed enclosure for bass guitar.



- |                                   |                                                 |                                                |                                                   |
|-----------------------------------|-------------------------------------------------|------------------------------------------------|---------------------------------------------------|
| <input type="checkbox"/> Midrange | <input checked="" type="checkbox"/> Woofer      | <input checked="" type="checkbox"/> Sealed Box | <input checked="" type="checkbox"/> Scoop Loading |
| <input type="checkbox"/> Midbass  | <input checked="" type="checkbox"/> Subwoofer   | <input checked="" type="checkbox"/> Vented Box | <input checked="" type="checkbox"/> Horn Loading  |
|                                   | <input checked="" type="checkbox"/> Bass Guitar |                                                |                                                   |

### SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating**	
Watts	1200 W
Music Program	2400 W
Resonance	40 Hz
Usable Frequency Range	39 Hz – 1.2 kHz
Sensitivity***	94.7 dB
Magnet Weight	109 oz.
Gap Height	0.375", 9.5 mm
Voice Coil Diameter	4", 102 mm

### THIELE & SMALL PARAMETERS\*

Fs	40 Hz
Re	5.18 Ω
Le	1.48 mH
Qms	11.94
Qes	0.54
Qts	0.52
Vas	3.95 cu.ft., 111.97 liters
Vd	770.7 cc
Cms	0.11 mm/N
BL	18.14 T-M
Mms	137 grams
EBP	74
Xmax	9 mm
Sd	856.3 cm <sup>2</sup>
Xlim	15.5 mm

### MOUNTING INFORMATION


Recommended Enclosure Volume	
Sealed	43.89–99.11 liters, 1.55–3.5 cu.ft.
Vented	67.96–205.3 liters, 2.4–7.25 cu.ft.
Driver Volume Displaced	0.152 cu.ft., 4.31 liters
Overall Diameter	15.21", 386.3 mm
Baffle Hole Diameter	14", 355.6 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.28", 7.1 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.56", 166.6 mm
Net Weight	23.7 lbs, 10.75 kg
Shipping Weight	26 lbs, 11.79 kg

### MATERIALS OF CONSTRUCTION

- \_\_\_\_\_ Copper voice coil
- \_\_\_\_\_ Polyimide former
- \_\_\_\_\_ Ferrite magnet
- \_\_\_\_\_ Undercut with aluminum shorting ring and Core
- \_\_\_\_\_ Periphery Ventilation
- \_\_\_\_\_ Die-cast aluminum basket
- \_\_\_\_\_ Water resistant paper cone
- \_\_\_\_\_ Cloth cone edge
- \_\_\_\_\_ Water resistant treated paper dust cap



### FREQUENCY RESPONSE & IMPEDANCE CURVE\*

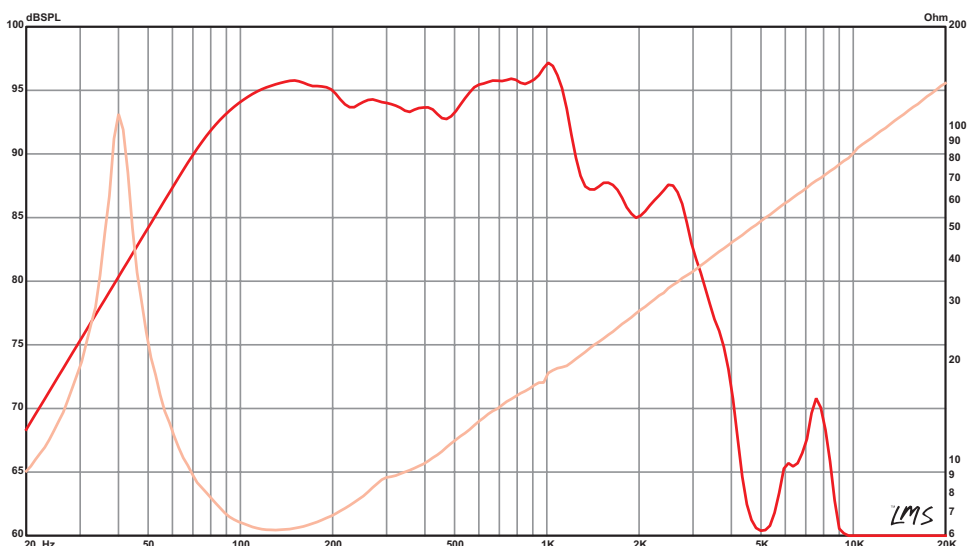

LEARN MORE AT [EMINENCE.COM](http://EMINENCE.COM)



*From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.*

## MISSION STATEMENT

*Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.*

## FOOTNOTES

- \* Please consult [www.eminence.com](http://www.eminence.com) for specifications of models with alternative impedances.
- \*\* Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.
- \*\*\* The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).
- \*\*\*\* BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.
- \*\*\*\*\* Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.
- \*\*\*\*\*The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

**EMINENCE SPEAKER LLC**

838 Mulberry Pike, Eminence, KY 40019



*Follow us:*

EMINENCE.COM



YouTube