

# NEODYMIUM SERIES

## KL3010LF-8

Lightweight high-power subwoofer recommended for vented and horn loaded enclosures.

- 900 W Program Power
- 10" Nominal Diameter
- 8 Ω

APPLICATION		ENCLOSURE	
Midrange	<input type="checkbox"/>	Sealed Box	<input type="checkbox"/>
Midbass	<input type="checkbox"/>	Vented Box	<input checked="" type="checkbox"/>
Woofer	<input checked="" type="checkbox"/>	Scoop Loading	<input type="checkbox"/>
Subwoofer	<input checked="" type="checkbox"/>	Horn Loading	<input checked="" type="checkbox"/>
Bass Guitar	<input checked="" type="checkbox"/>		



### SPECIFICATION

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	900 W
Nominal Power	450 W
Resonance	44.8 Hz
Usable Frequency Range	42 Hz – 1.6 kHz
Sensitivity*	92 dB
Magnet Weight	11 oz.
Gap Height	0.365", 9.3 mm
Voice Coil Diameter	3.0", 76.2 mm

### THIELE & SMALL PARAMETERS

Fs	44.8 Hz
Re	7.03 Ω
Le	0.87 mH
Qms	6.95
Qes	0.33
Qts	0.31
Vas	1.67 cu.ft., 47.33 liters
Vd	321.12 cc
Cms	0.24 mm/N
BL	17.98 T-M
Mms	53.23 grams
EBP	137.35
Xmax	8.5 mm
Sd	376.9 cm <sup>2</sup>
Xlim	15.7 mm

### MOUNTING INFORMATION


Recommended Enclosure Volume	
Sealed	N/A
Vented	0.70–19.82 liters, 3.0–84.95 cu.ft.
Driver Volume Displaced	64.69 cu.in., 1.06 liters
Overall Diameter	10.25", 260.35 mm
Baffle Hole Diameter	9.12", 231.65 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.285", 7.24 mm
Mounting Holes B.C.D.	9.73", 247.14 mm
Depth	4.875", 123.83 mm
Net Weight	7.1 lbs , 3.22 kg
Shipping Weight	8.9 lbs , 4.04 kg

### MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Neodymium magnet
- Vented core
- Cast aluminum basket
- Paper cone
- Cloth cone edge
- Treated paper dust cap



### FREQUENCY RESPONSE & IMPEDANCE CURVE\*

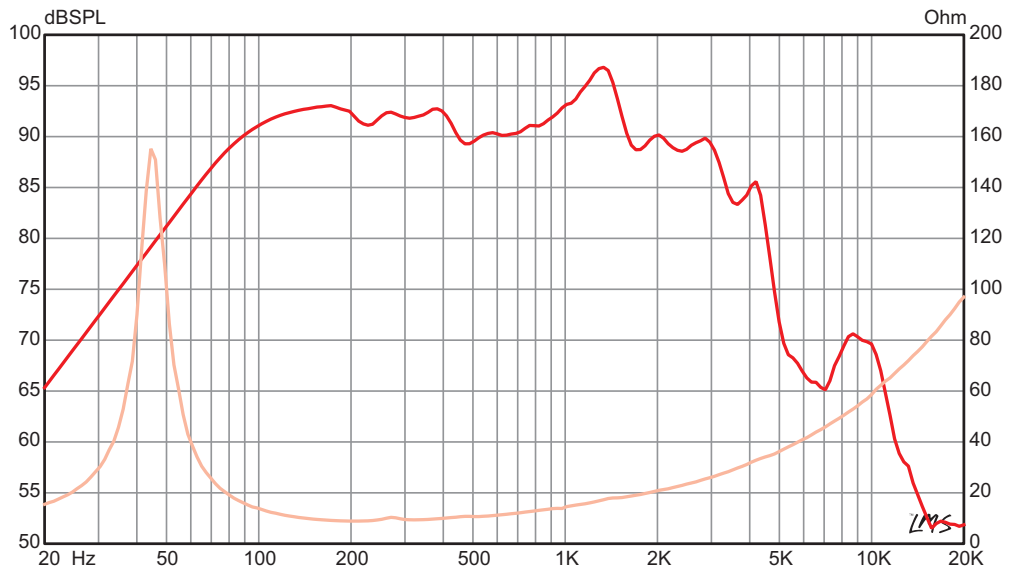

VISIT [EMINENCE.COM](http://EMINENCE.COM) TO FIND A DEALER NEAR YOU.

\* See footnotes on page 2 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



*From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.*

## MISSION STATEMENT

*Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.*

## FOOTNOTES

- \* Please consult [www.eminence.com](http://www.eminence.com) for specifications of models with alternative impedances.
- \*\* Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.
- \*\*\* The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).
- \*\*\*\* BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.
- \*\*\*\*\* Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.
- \*\*\*\*\*The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

**EMINENCE SPEAKER LLC**

838 Mulberry Pike, Eminence, KY 40019



*Follow us:*

[EMINENCE.COM](http://EMINENCE.COM)

