

Specification

Nominal Basket Diameter	8", 203.2mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	200W
Music Program	N/A
Resonance	57Hz
Usable Frequency Range***	60Hz-3.5kHz
Sensitivity	90.8
Magnet Weight	38 oz
Gap Height	0.312", 7.92mm
Voice Coil Diameter	2", 50.8mm

Thiele & Small Parameters

Resonant Frequency (fs)	57Hz
DC Resistance (Re)	5.4
Coil Inductance (Le)	0.62mH
Mechanical Q (Qms)	9.8
Electromagnetic Q (Qes)	0.40
Total Q (Qts)	0.39
Compliance Equivalent Volume (Vas)	21.5 ltr/0.76 cu. ft.
Peak Diaphragm Displacement Volume (Vd)	64cc
Mechanical Compliance of Suspension (Cms)	0.33mm/N
BL Product (BL)	10.7 T-M
Diaphragm Mass inc. Airlod (Mms)	24 grams
Efficiency Bandwidth Product (EBP)	143
Maximum Linear Excursion (Xmax)	3.0mm
Surface Area of Cone (Sd)	214.1cm ²
Maximum Mechanical Limit (Xlim)	6.0mm

Mounting Information

Recommended Enclosure Volume	
Sealed	11-14 ltr/0.38-0.48 cu. ft.
Vented	11-31 ltr/0.4-1.1 cu. ft.
Overall Diameter	8.24", 209.2mm
Baffle Hole Diameter	7.13", 181mm
Front Sealing Gasket	Fitted as Standard
Rear Sealing Gasket	N/A
Mounting Holes Diameter	0.22", 5.5mm
Mounting Holes B.C.D.	7.75", 196.9mm
Depth	3.6", 92mm
Net Weight	6.7 lbs, 3 kg
Shipping Weight	7.4 lbs, 3.4 kg


Materials of Construction

Coil Construction	Copper
Coil	Polyimide
Magnet Composition	Ferrite
Core Details	Tapered Coax
Basket Materials	Pressed Steel
Cone Composition	Polypropylene
Cone Edge Composition	Rubber
Dust Cap Composition	Zurette



ACOUSTINATOR™ CX2008

Recommended for full-range, acoustic instruments in both sealed and vented enclosures. Co-axial for extended HF.

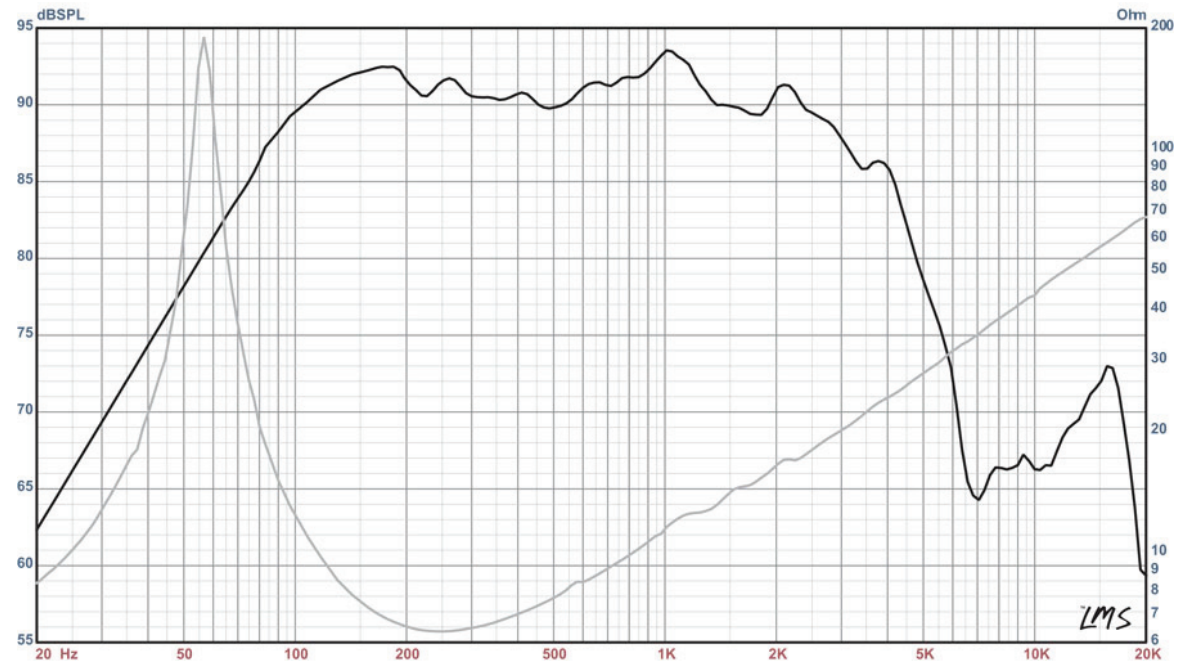

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, nontemperature-controlled environment.

*** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. I.e: 2.83 V/8 ohms, 4 V/16 ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. X 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)